

TRANSPORTATION BULLETIN



Illinois Department of Transportation

ADDENDUM NO. 1

Dated: June 13, 2012

For: Transportation Bulletin
Volume 15, No. 19r
Dated: May 11, 2012
Revised June 5, 2012
Letting Date: June 15, 2012

Item No. 1A – New Airfield Lighting Vault

University of Illinois - Willard Airport
Savoy, Illinois
Champaign County
IL Project No.: CMI-4100
AIP Project No.: 3-17-0016-xx
Contract No.: UN051

REASON FOR ADDENDUM:

Special Provisions to Specifications Revisions
Construction Plan Revisions

TO ALL PLAN HOLDERS:

SPECIFICATIONS

103-2.2 TOWERS

REVISE: Special Provision to read:

Beacon pole shall be 50-foot mounting height. Pole shall be a “tipdown” pole, Hali-Brite 8000-50TP, or equivalent, and shall conform to FAA Advisory Circular 150/5340-30.

125-2.8 LIGHT CANS (NON LOAD BEARING).

REVISE: Special Provision to read:

Light Bases shall be Class 1A (steel), size E as detailed on the drawings...


PLANS

Replace Plan Sheet 6 with Revised Plan Sheet 6 of 60.

The beacon pole height was 25' or 50' in different locations on the plans. The intent is to have a 50' pole installed.

Replace Plan Sheet 27 with Revised Plan Sheet 27 of 60.

1. Replace all references to "8000-25TP" to read "8000-50TP". Pole shall be 50 foot tubular steel airport beacon tipdown pole, Hali-Brite, or equivalent.
2. Replace SECTION THRU FOUNDATION detail with the following:

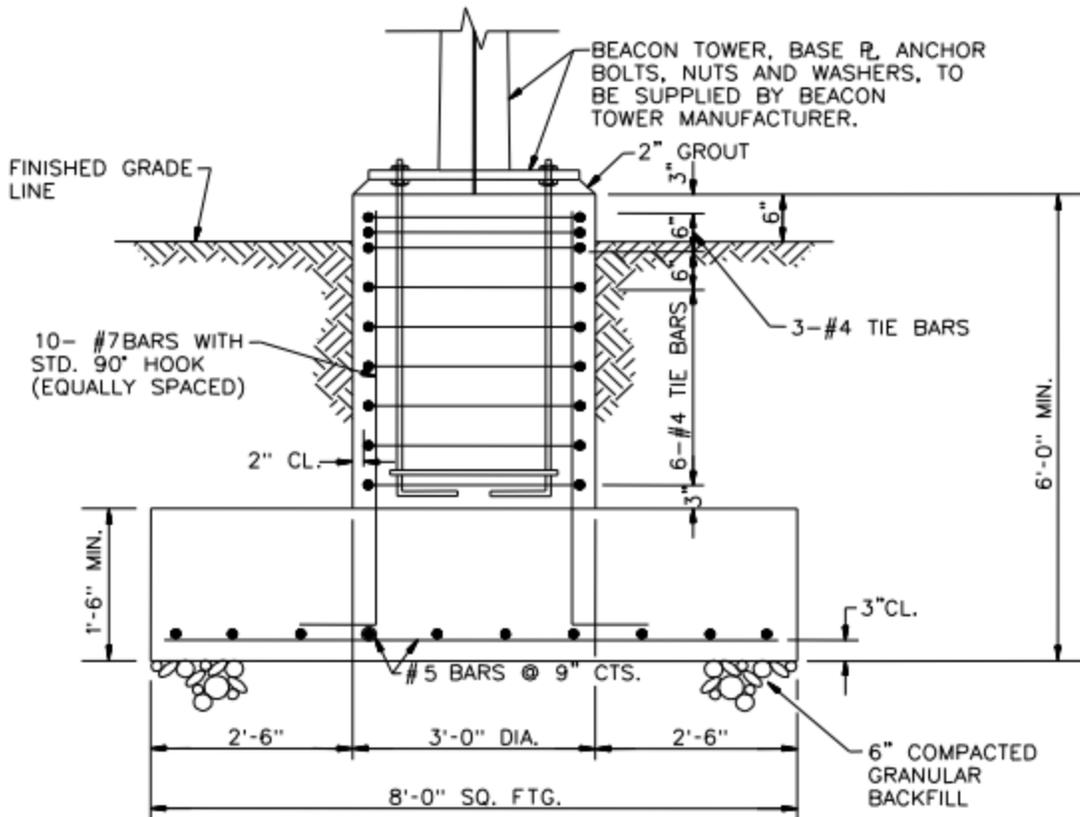

SECTION THRU FOUNDATION

N.T.S.

END OF ADDENDUM No. 1